




PROMATECT®-MT

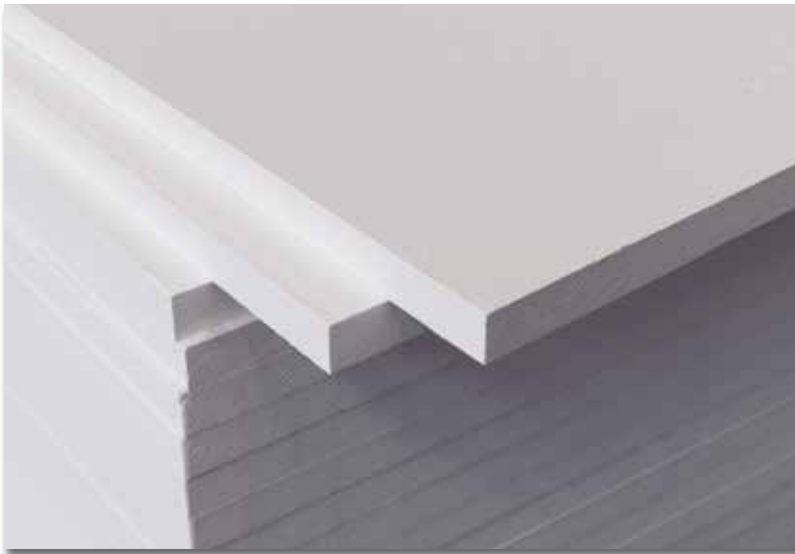

Product description

PROMATECT®-MT is a self-supporting fire protection board based on calcium silicate.

Properties & advantages

- Mechanically and dimensionally stable
- High surface hardness
- Machinable with woodworking tools
- Production is certified according to ISO 9001

Typical applications

FIRE-RATED ASSEMBLIES

- Building and industrial construction, for fire protection and dampers

Working and processing

Machining (sawing, drilling, grinding etc.) creates dust. Dust can be harmful to health. Avoid contact with eyes and skin. Do not inhale the dust. Comply to local dust limits (OEL). Request product safety information sheet.

Storage

Store in a dry place, free of frost

Disposal/waste code

Stones and bricks 170904 (EWC)

Accessories

- Promat® Impregnation 2000
- Promat®-SR-Impregnation
- Promat®-Glue K84

Technical data

Reaction to fire (EN 13501-1, DIN 4102)		A1, non-combustible
Density	kg/m ³	approx. 640
Alkalinity	pH-value	approx. 7-10
Colour		white/beige
Surface		both sides sanded

Climate characteristics

Thermal conductivity 20 °C	W/m K	0.20
Humidity	%	≤ 5 (air-dry)
Expansion due to moisture	%	≤ ± 0.1 (dry/saturated)
Water vapour diffusion resistance factor	μ-value	approx. 15

Mechanical characteristics

Bending strength (EN 12467)		
Thickness ≤ 60mm	N/mm ²	≥ 4.4
Thickness = 70mm	N/mm ²	≥ 4.0
Compressive strength (EN 826)	N/mm ²	approx. 15
Tensile strength (EN 319)	N/mm ²	≥ 0.8 (perpendicular to the panel surface)

Delivery sizes

Length x width (tolerances)	mm	2500 x1200 (± 1.0)
Thickness (tolerances)	mm	12.7 / 16 / 19 / 25 / 30 / 40 / 50 / 60 / 70 (± 0.4)

All data contained in this publication are provided in good faith and are correct at the time of printing. Data are representative of production and are subject to normal production fluctuations, they should not be deemed to constitute or imply any warranty of performance, the user is held responsible for determining the suitability of the products for the given application. Errors and omissions excepted. All drawings and representations remain our exclusive property and cannot be used, totally or in part, without our prior written approval. Excerpts, reproductions, copies, etc. of our publications require our prior approval. This publication renders all previous ones invalid. Our terms of delivery and payment apply in the event of any claim. Promat and Microtherm are registered trademarks. © Copyright Etex NV, Brussels, Belgium. All rights reserved. 2018-08

Etex Industry c/o Microtherm N.V., Industriepark-Noord 1, 9100 Sint-Niklaas, Belgium | T +32 (0)3 760 19 80 | F +32 (0)3 760 19 99
info@promat-industry.com | www.promat-industry.com