

# PROMATHERM®-VE 250, -VE 400



### Composite insulation boards

PROMATHERM®-VE elements are large-sized building elements with extraordinary good insulating properties.

PROMATHERM®-VE 250 consists of two 6 mm PROMATECT®-H top boards, which are bonded with a temperature resistant mineral wool core.

PROMATHERM®-VE 400 consists of two 8 mm PROMATECT®-H top boards, which are bonded with a temperature resistant mineral wool core.

Production is quality assured according to ISO 9001.

Technical data						
Type		-VE 250			-VE 400	
Colour		grey			grey	
Building material class	DIN 4102	A1, non-combustible			A1, non-combustible	
Classification temperature	°C	250			400	
		Insulation board: PROMATECT®-H	Mineral wool core: PROMALAN®-CR	Insulation board: PROMATECT®-H	Mineral wool core: PROMALAN®-CR	
Bulk density	kg/m <sup>3</sup>	870	150	870	150	
Cold compressive strength	N/mm <sup>2</sup>	9.3	0.115	9.3	0.115	
Thermal conductivity 100 °C	W/m K	0.17	0.05	0.17	0.05	

Delivery sizes							
Type		-VE 250			-VE 400		
Length x width	mm	2500x1250			2500/3000x1250		
Top board thickness	mm	6			8		
Element description		Element thickness	Core thickness	Weight	Element thickness	Core thickness	Weight
		40 mm	28 mm	15 kg/m <sup>2</sup>	45 mm	28 mm	19 kg/m <sup>2</sup>
		60 mm	48 mm	18 kg/m <sup>2</sup>	65 mm	48 mm	22 kg/m <sup>2</sup>
		80 mm	68 mm	21 kg/m <sup>2</sup>	85 mm	68 mm	25 kg/m <sup>2</sup>
		100 mm	88 mm	24 kg/m <sup>2</sup>	105 mm	88 mm	28 kg/m <sup>2</sup>

Production tolerances						
Type		-VE 250			-VE 400	
Length & width	mm	± 5.0			± 5.0	
Thickness	mm	± 3.0			± 3.0	

# PROMATHERM®-VE 250, -VE 400

### Properties & advantages

- Large-sized, self-supporting
- Excellent permanent temperature resistance
- Minimum thermal bridges
- Vibration proof
- Dimensionally stable, low thermal expansion
- Secure and variable fixings and connections
- Open to diffusion
- Corrosion and rot resistant

### Application areas

#### HEAVY INDUSTRY

PROMATHERM®-VE elements are used as prefabricated parts for:

- Wall and ceiling elements
- Partition walls
- Flue gas ducts in dryer
- Industrial furnaces and plant construction

### Working & processing

PROMATHERM®-VE elements is processed with carbide-tipped tools. Read and understand the safety information sheet.

When cutting to size, the maximum workplace concentration values for inhalable dust must be observed. Dust extraction is recommended. See product safety information sheet.

Mechanical attachment should be clamped joints. In the case of screw connections use slotted holes if possible.

### Heat transmission


#### PROMATHERM®-VE 250

##### Example:

Temperature inside  $T_i$ : 175 °C  
Wall thickness: 60 mm

##### Result:

Outs. wall temp.  $T_{wall}$ : 41 °C  
Heat loss  $Q$ : 160 W/m<sup>2</sup>

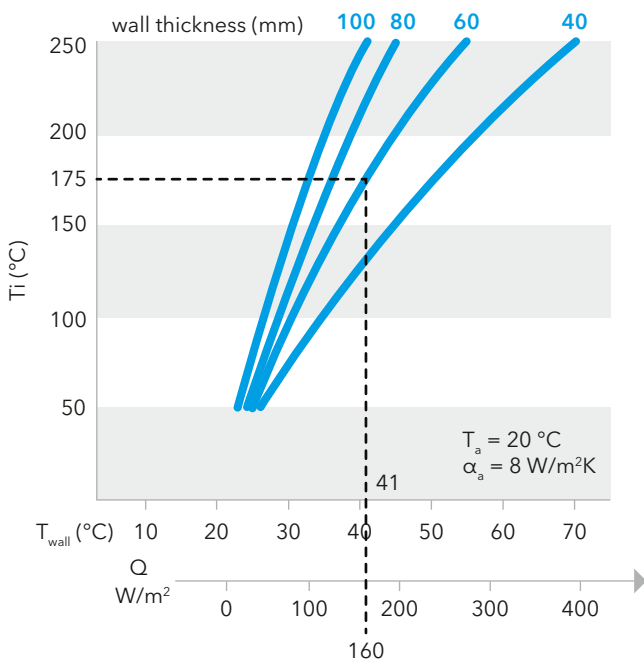


#### PROMATHERM®-VE 400

##### Example:

Temperature inside  $T_i$ : 350 °C  
Wall thickness: 65 mm

##### Result:

Outs. wall temp.  $T_{wall}$ : 63 °C  
Heat loss  $Q$ : 425 W/m<sup>2</sup>

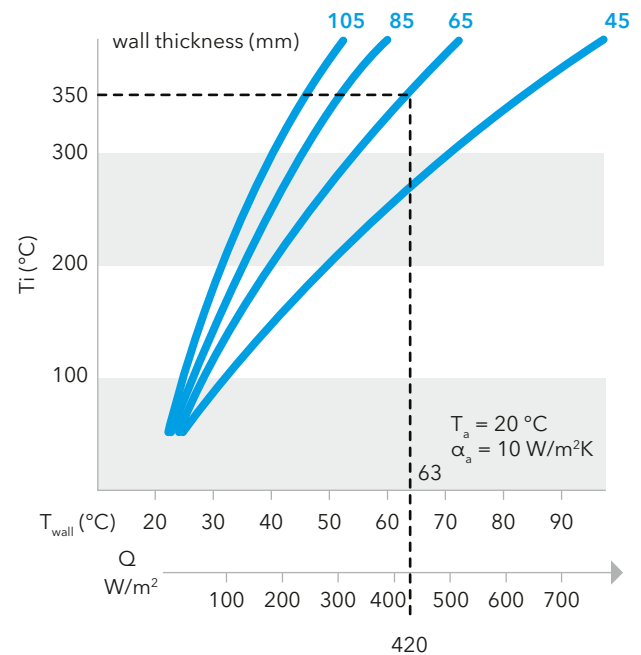

All data contained in this publication are provided in good faith and are correct at the time of printing. Data are representative of production and are subject to normal production fluctuations, they should not be deemed to constitute or imply any warranty of performance, the user is held responsible for determining the suitability of the products for the given application. Errors and omissions excepted. All drawings and representations remain our exclusive property and cannot be used, totally or in part, without our prior written approval. Excerpts, reproductions, copies, etc. of our publications require our prior approval. This publication renders all previous ones invalid. Our terms of delivery and payment apply in the event of any claim. Promat and Microtherm are registered trademarks. © Copyright Etex NV, Brussels, Belgium. All rights reserved. 2017-12